

LUMINEX

HOMOGENEOUS VINYL FLOORING



CERTIFIED
LOW VOC



ANTI-IODINE
ANTI-ACID
ANTI-ALKALI



ANTI-BACTERIAL



TERMITE
PROOF



SOUND
ACOUSTIC



100%
WATERPROOF



WEAR
GUARD



SCRATCH
RESISTANT



SLIP
RESISTANT



STAIN
RESISTANT





FADE
RESISTANT



100%
RECYCLABLE

- 1** Resource saving, environment protection, green and low carbon emission.
- 2** Super fire resistance to guarantee safety in use.
- 3** Excellent anti-acid, anti-alkali, anti-stain and abrasion resistance.
- 4** Great elasticity and extremely low indentation from rolling and static load.
- 5** Non-directional design helps to reduce waste during installation.
- 6** Rich and complete color combination to meet the needs of different scenes collocation.

- 1** PUR Coating
- 2** Homogeneous Structure

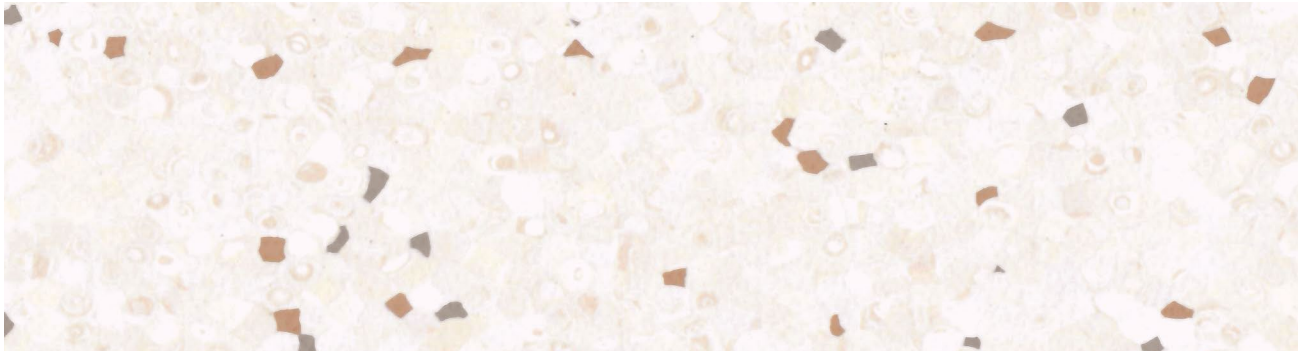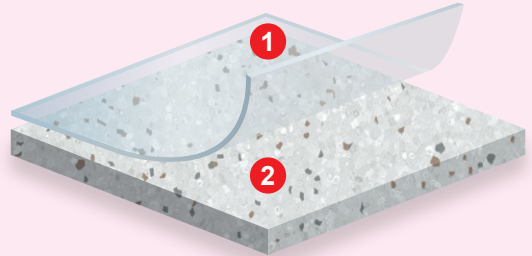


1194-Dune Beige

★ In stock




1198-Sandy Brown

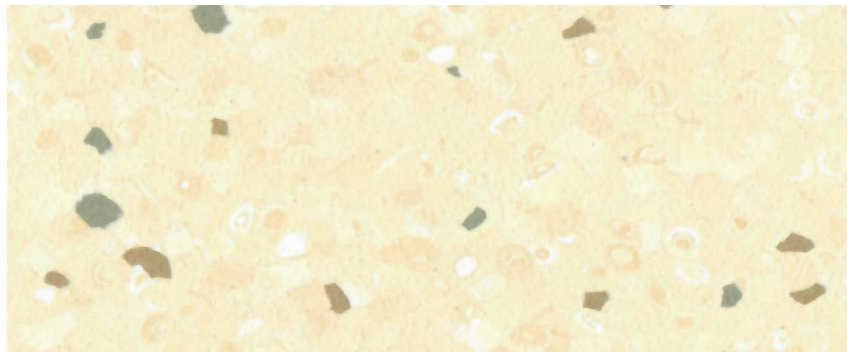

1199-Corn Silk




1200-Lemon Zest

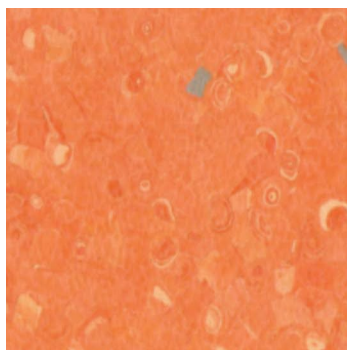


1201-Orange Crush




1206-Powder Blush

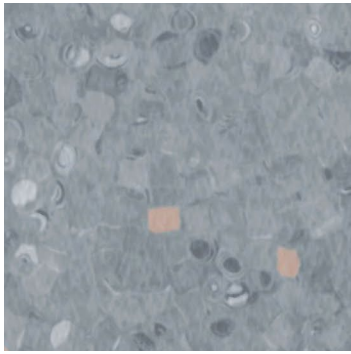


1197-Slate Grey

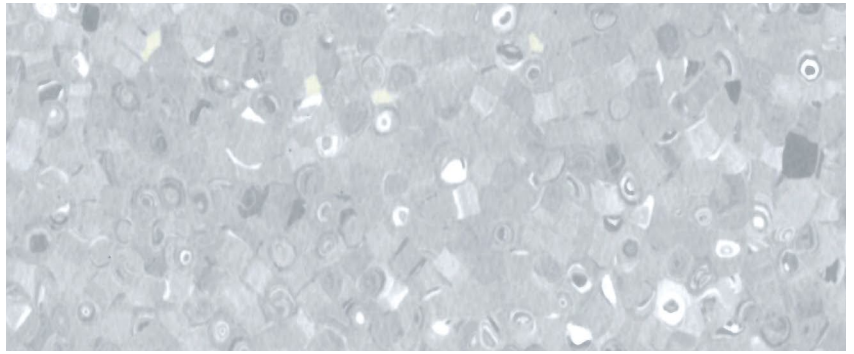


1207-Metallic Grey

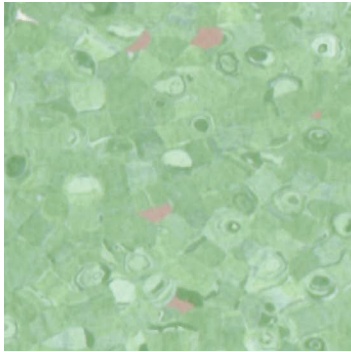


1204-Mossy Green

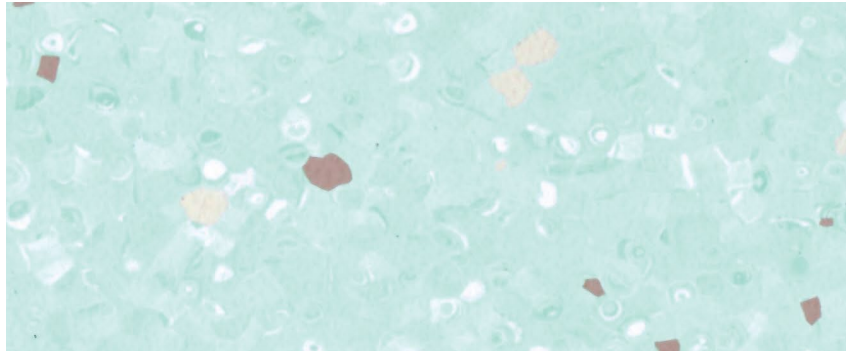

1203-Medic Green

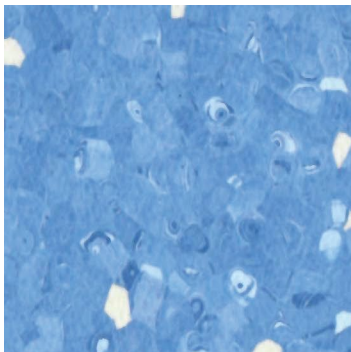


1205-Tornado Blue

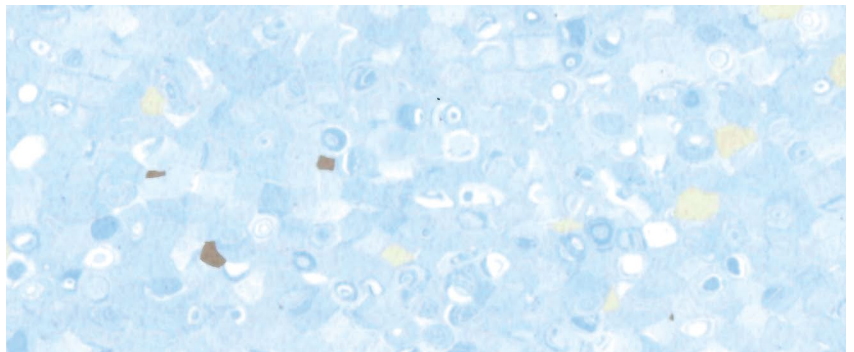

1202-Ocean Odyssey



Education

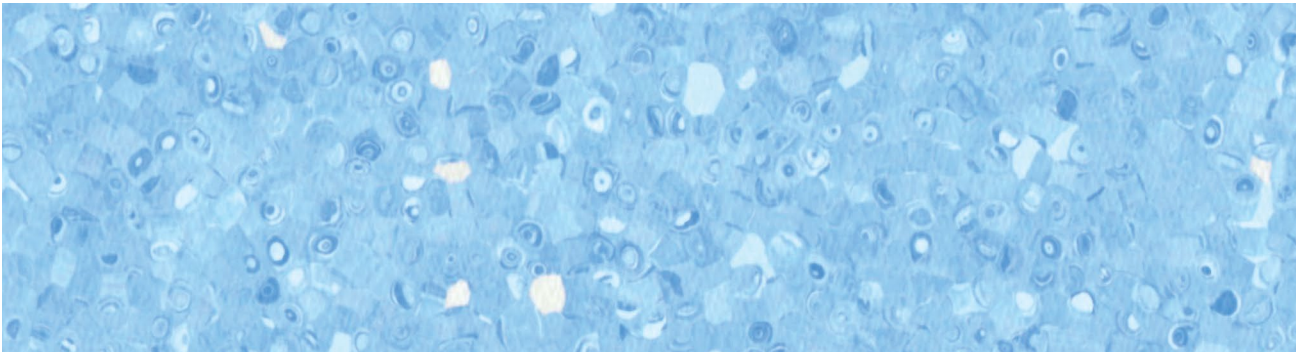


1195-Blue Horizon


★ In stock




1208-Pearl White

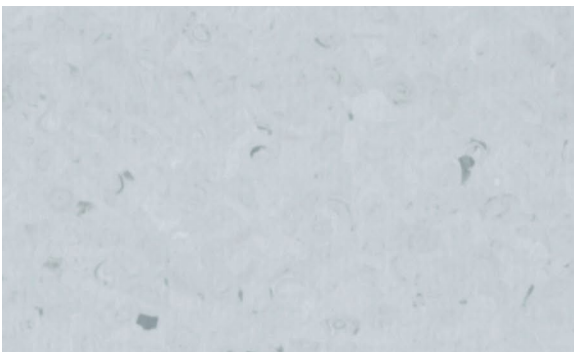

1209-Grey Mirage

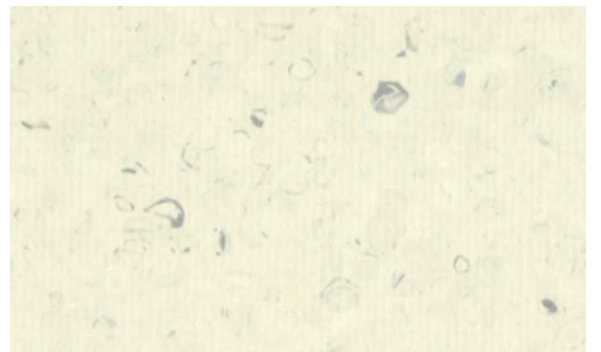

1210-Sand Castle

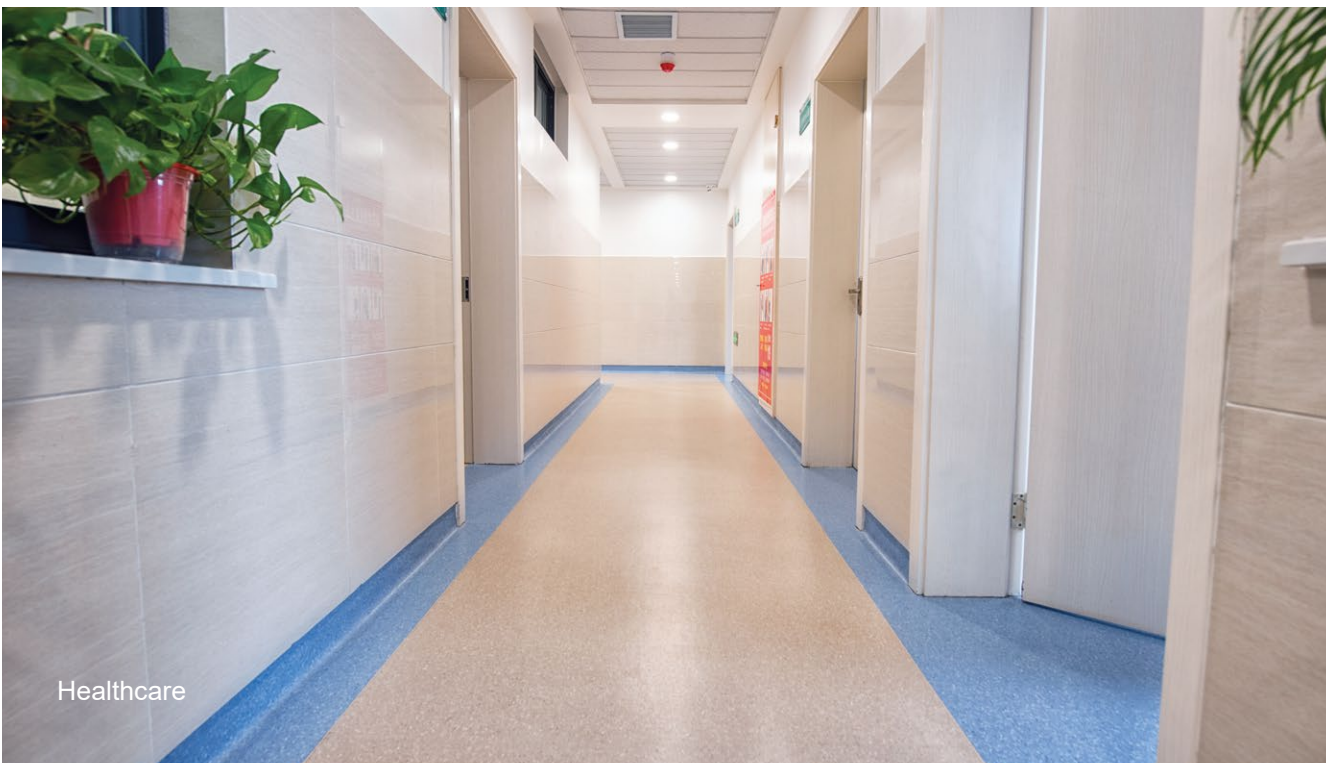

Healthcare




Workplace



1196-Ice Grey

★ In stock

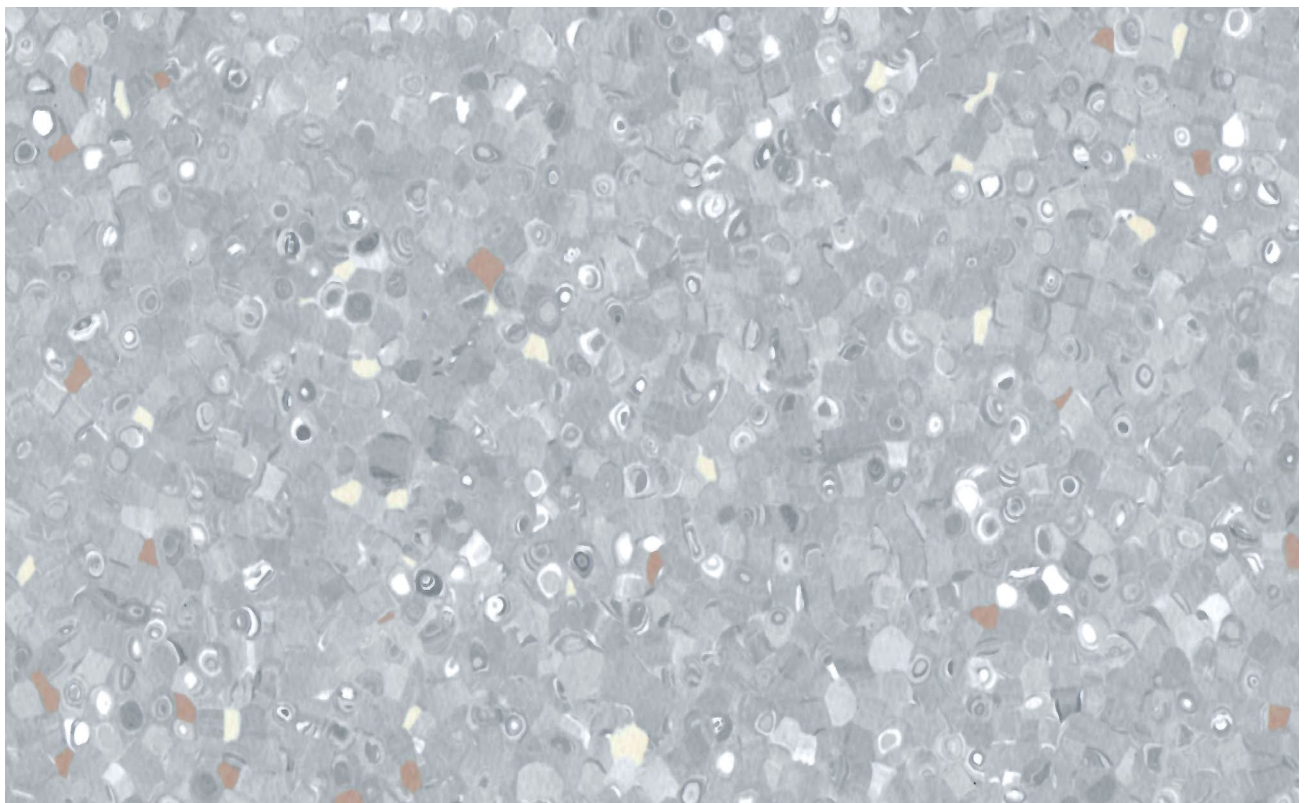

1193-Galaxy Grey

★ In stock



Healthcare

HOMOGENEOUS VINYL FLOORING

TEST ITEMS	TEST METHOD	TEST RESULTS
Total Thickness	EN ISO 24346	2.0mm
Weight	EN ISO 23997	2850g/m ²
Roll Width	EN ISO 24341	2m
Roll Length	EN ISO 24341	20-24m
CLASSIFICATION		
European Rating	EN 685	34-43
Fire Classification	EN 13501-1	ClassBf _{1,s1}
	EN ISO 9239-1	≥8KW/m ²
Anti-static Property	EN ISO 11925-2	Qualified
	EN 1815	< 2KV
Anti-slip Test	DIN 51130	R9
	EN 13893	μ≥0.3
PERFORMANCE		
Wear Resistance	EN 660-2	Group T Fv≤2.0mm ³
Dimensional Stability	EN ISO 23999	≤0.4%
Residual Indentation	EN ISO 24343-1	≤0.04mm
Castor Chair Test	EN 425	Qualified
Flexibility	EN ISO 24344	Qualified (20mm)
Color Fastness	EN ISO 105-B02	Grade 6
Chemical Resistance	EN ISO 26987	Fine
Anti-iodine	EN ISO 26987	Grade 0
Anti-bacterial Property	EN ISO 846	No Bacteria
Special Maintenance Treatment		PUR
TVOC after 28 Days	ISO 16000	< 10μg/m ³
Improvement of Sound Insulation	EN ISO 717-2	3dB



CNAS L0690



CNAS C024-Q



ISO14001



ISO9001



ISO45001



LIVINN

FIRST CHOICE



OUR BRANDS



scan to visit

www.primelay.com.my

PSF INDUSTRIES SDN BHD (912218-D)

No. 19, Jalan BA/3, Kawasan Perusahaan Bukit Angkat, 43000 Kajang, Selangor, Malaysia.

+603-8741 3841

+6017-556 0103

admin@primelay.com.my

