

FIRST CHOICE

“CROSSBREED” WOOD BASE TECHNOLOGY FOR EVERLASTING FLOORING EXPERIENCES



BURMESE WOOD 1077

5★ ★ ★ ★ ★
5 STAR

GERMAN
TECHNOLOGY 

WATER RESISTANCE WOOD FLOORING

PRIMEFLOOR
TRUSTED PARTNER IN FLOORING




FIRST CHOICE

1074 GRAND WOOD



Plank Size : 170 x 1219mm
Thickness : 5mm
Quantity : 13pcs/pack

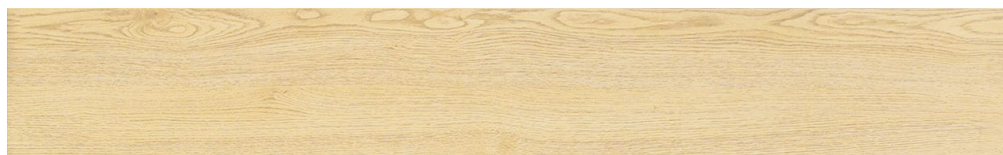

1075 FORMOSA GREY



Plank Size : 170 x 1219mm
Thickness : 5mm
Quantity : 13pcs/pack



*The colour shown in this catalog may appear slightly different tone than actual products.
Please request physical samples for actual colour reference.*

FIRST CHOICE

1076

TASMANIAN LATTE



Plank Size : 170 x 1219mm

Thickness : 5mm

Quantity : 13pcs/pack



1077

BURMESE WOOD



Plank Size : 170 x 1219mm

Thickness : 5mm

Quantity : 13pcs/pack



*The colour shown in this catalog may appear slightly different tone than actual products.
Please request physical samples for actual colour reference.*

FIRST CHOICE

1078
TEAK WOOD



Plank Size : 170 x 1219mm
Thickness : 5mm
Quantity : 13pcs/pack



1079
TEMPLAR WOOD



Plank Size : 170 x 1219mm
Thickness : 5mm
Quantity : 13pcs/pack



*The colour shown in this catalog may appear slightly different tone than actual products.
Please request physical samples for actual colour reference.*

FIRST CHOICE

1080


AMAZON WOOD



Plank Size : 170 x 1219mm

Thickness : 5mm

Quantity : 13pcs/pack

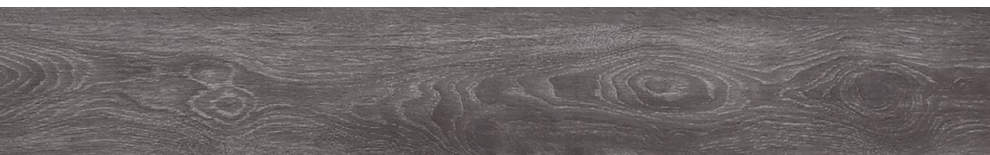

1081


MONTRE WALNUT



Plank Size : 170 x 1219mm

Thickness : 5mm

Quantity : 13pcs/pack

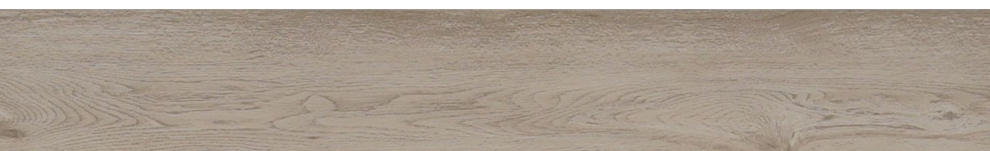


*The colour shown in this catalog may appear slightly different tone than actual products.
Please request physical samples for actual colour reference.*


VINYL FLOORING ACCESSORIES




PVC Skirting | Model : PDF70




PVC Skirting | Model : PDF95




PVC L-Profile | Model : PTE2030




PVC End-Profile | Model : PTE424




PVC A-Profile | Model : PWD1



PVC T-Profile | Model : PST2



COLOUR AVAILABLE: Snow White • Golden Wood • Morning Dew • Timber Lite • Ash Grey • Chestnut • Dark Walnut • Royal Wood



DESCRIPTION

DIMENSIONS

FORMAT

Width	170 mm
Length	1219 mm
Number of panels per pack	13
m ² per pack	29.10 ft ²
Bevels	Painted bevel
Thickness	5 mm
Tongue and groove	Unilin 2G
Warranty	5-10 years*

GENERAL DATA (ACCORDING TO EN 13329)

	METHOD		NORM REQUIREMENTS	FIRST CHOICE VALUES
Wear resistance	EN 13329		≥4000 cycles	≥4000
Impact resistance	EN 13329		IC2	IC2
Scratch resistance	EN 438-2, 25		Charge ≥3N	Charge ≥3N
Thickness swelling	ISO 24336	After 24h immersion at 20°C	≤8	≤5
Locking strenght	ISO 24334	Fl0,2 long side	≥1 kN/m	≥1 kN/m
		Fmax long side		
		Fs0,2 short side	≥2 kN/m	≥2 kN/m
		Fmax short side		
Surface soundness	EN 13329	N/mm ²	≥1.25	≥1.25
General appearance	EN 13329	Height differences	≤0.15mm	≤0.10
		Opening between joints Cupping in the length	≤0.20mm concave≤0.50% convex≤1%	≤0.10 concave≤0.50% convex≤1%
		Cupping in the width	concave≤0.15% convex≤0.20%	concave≤0.10% convex≤0.15%

OTHER TECHNICAL DATA

TEST ITEMS	UNIT	STANDARD REQUIREM	TEST RESULTS	ITEM EVALUATE
Diagonal	mm	≤5	eligible	eligible
Warpage	mm/m	≤3	eligible	eligible
The edge is not straight	mm/m	≤18	eligible	eligible
Density	Kg/m ³	≥860	1150	eligible
Bending Strength	MPa	mean value≥40	48.49	eligible
Elasticity Modulus	MPa	mean value≥3500	4434	eligible
Internal bonding	MPa	mean value≥1.3	1.65	eligible
Surface bonding	MPa	mean value≥1.3	1.97	eligible
Surface resistance to contamination and decay	–	No contamination No corrosion	No contamination No corrosion	eligible

ENVIRONMENT, SAFETY & HEALTH

	METHOD	ARAMETERS	NORM REQUIREMENTS	FIRST CHOICE VALUES
Formaldehyde emission	EN 717-1	ppm	E1 < 0,1	< 0,1
Reaction to fire	EN 13501-1	Class		Cfl-s1
Thermal resistance	EN 12996:2001	m ² K/W		/ m ² K/W
Slip resistance	EN 13893	μ	μ≥0.3	μ≥0.5

*Limited Warranty. T & C apply.

CERTIFICATION



ANTI-STATIC



HIGH-HEELED
SHOES FRIENDLY



PET FRIENDLY



PVC FREE BOARD



MORE AFFORDABLE

SPC
CLIQ

URBAN
CLIQ

LIVINN

FIRST
CHOICE

PRIME
FLOOR

CARPET
TILE

BROADLOOM
CARPETS

MOSQUE
CARPETS

KAYU PLUS
LAMINATE FLOORING

ELEGANT
CLIQ

Yes!

Floor Plus
Accessories

OUR BRANDS

PRIMEFIT

PRIME
Play

PRIME
Décor

PRIME
Ballistic

PRIME
Sports

PRIME
Paver

PRIME
Flex

Grass King

Acous
TED
UNDERLAY

DURAFORT
UNDERLAY

Aktiv
MAT

Activ
Sports Surface



scan to visit

www.primelay.com.my

PSF INDUSTRIES SDN BHD (912218-D)

No. 19, Jalan BA/3, Kawasan Perusahaan Bukit Angkat,
43000 Kajang, Selangor, Malaysia.

+603-8741 3841

+6017-556 0103

admin@primelay.com.my

