

# LIVINN

LUXURY KOREAN VINYL FLOORING



Vanilla Oak - 1426

고급 한국 비닐 바닥재



### **Why Choose PRIME FLOOR Brand Products?**

PRIME FLOOR is an established brand in Malaysia, always focusing on quality products with affordable price. PRIME FLOOR has expertise in exporting rubber flooring products worldwide.

We know what is export standard which we have decided to explore to all Malaysian as well.

Flooring is the most important part we use everyday whether we are in house, office, hotel or restaurants. Don't compromise with your floor. A right product can satisfy your needs & peace of mind. A quality product from PRIME FLOOR Guarantee your satisfaction.

We are committed to provide high quality flooring. Not relying to cheap price/cheap quality concept. Our goal is to provide better quality which can afford easily by keeping lower margin to satisfy our customers.

We want to see all Malaysian Happy & Walk on a quality Floor... always, everyday.




## Our Specialty in Vinyl Flooring

- **Premium Quality:** High Quality Vinyl tile yet affordable. Quality that you can trust. Certified Green & Korean ISO, Livinn tiles are manufactured in high tech factory who has more than 30 years of experience manufacturing flooring & one of the largest manufacturing for Vinyl tile in Korea.
- **Premium Colours:** All colours selection were done by coordination among experience interior designers, flooring specialist, Asian taste in mind as well as Manufacturer recommendation & experiences. That makes our Vinyl ranges a superior collection of Classic wood & modern wood design for beautiful interiors.
- **Safety:** Livinn Vinyl tiles are made from high quality raw materials. Produced in Korea with high quality standard. Certified by Floor Score for green certification, Livinn tiles are extremely safe to use in any kind of indoor environment.
- **Service:** We are always welcoming & listen to you. Customer service is our top priority whether it's pre sales or post sales. Just contact us to know & get the ultimate service from our team.

### PRODUCT STRUCTURE

#### Livinn Vinyl Flooring

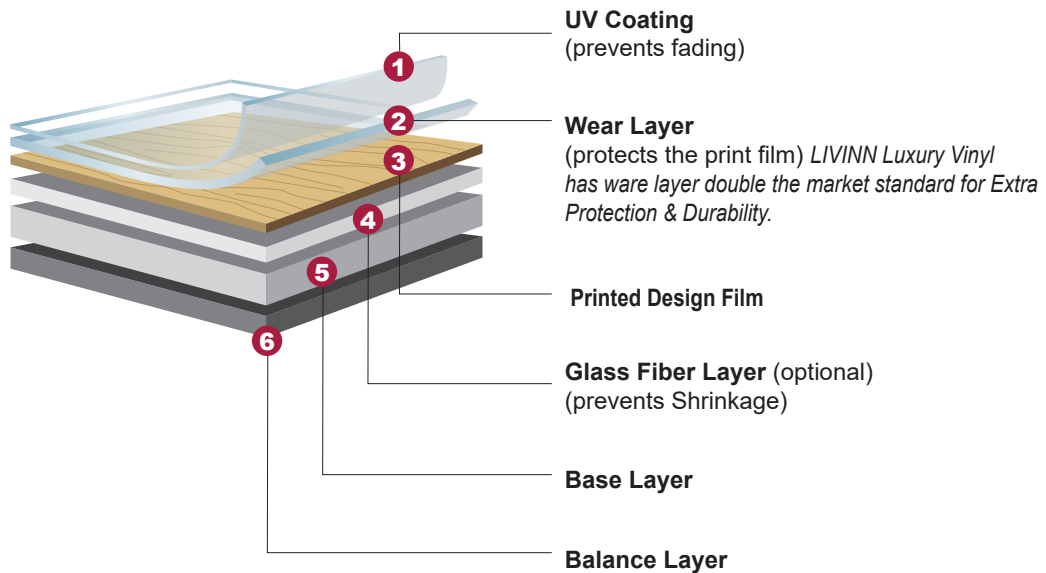

Livinn Vinyl Flooring are made of Virgin TOP Grade PVC materials which provides dimensional stability. Most of the product in the market use high recycle content which results in tile gaps & inconsistent tile size.





**Timber Oak - 833**

Plank Size : 184 x 950mm  
Thickness : 3mm  
Wear Layer : 0.2mm  
Quantity : 19pcs or 36sqft/carton



**Dark Cherry - 1063**

Plank Size : 184 x 950mm  
Thickness : 3mm  
Wear Layer : 0.2mm  
Quantity : 19pcs or 36sqft/carton








**American Walnut - 1064**

Plank Size : 184 x 950mm  
Thickness : 3mm  
Wear Layer : 0.2mm  
Quantity : 19pcs or 36sqft/carton

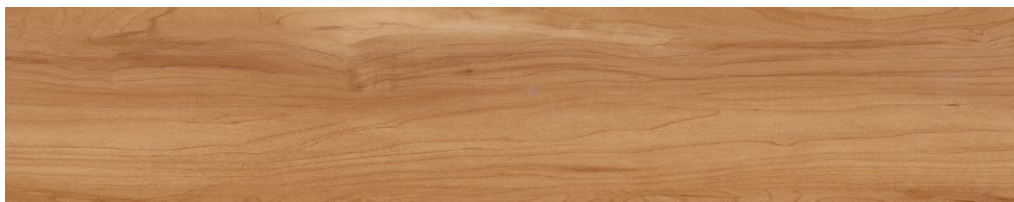

**Natural Teak - 1356**

Plank Size : 184 x 950mm  
Thickness : 3mm  
Wear Layer : 0.2mm  
Quantity : 19pcs or 36sqft/carton







**Electric Grey - 707**

**Plank Size** : 184 x 950mm  
**Thickness** : 3mm  
**Wear Layer** : 0.2mm  
**Quantity** : 19pcs or 36sqft/carton




**European Maple - 1060**

**Plank Size** : 184 x 950mm  
**Thickness** : 3mm  
**Wear Layer** : 0.2mm  
**Quantity** : 19pcs or 36sqft/carton





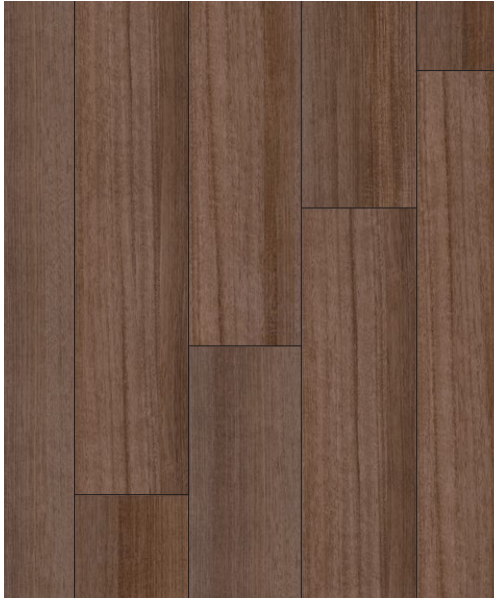

**Amber Walnut - 1355**

**Plank Size** : 184 x 950mm  
**Thickness** : 3mm  
**Wear Layer** : 0.2mm  
**Quantity** : 19pcs or 36sqft/carton




**African Blackwood - 1357**

**Plank Size** : 184 x 950mm  
**Thickness** : 3mm  
**Wear Layer** : 0.2mm  
**Quantity** : 19pcs or 36sqft/carton





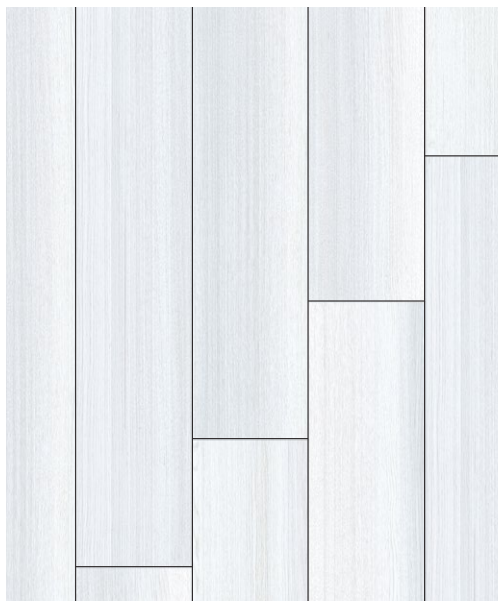

**Vanilla Oak - 1426**

Plank Size : 184 x 950mm  
Thickness : 3mm  
Wear Layer : 0.2mm  
Quantity : 19pcs or 36sqft/carton



**Woody Hazelnut - 706**

Plank Size : 184 x 950mm  
Thickness : 3mm  
Wear Layer : 0.2mm  
Quantity : 19pcs or 36sqft/carton








**Balsa Wood - 1425**


Plank Size : 184 x 950mm  
Thickness : 3mm  
Wear Layer : 0.2mm  
Quantity : 19pcs or 36sqft/carton

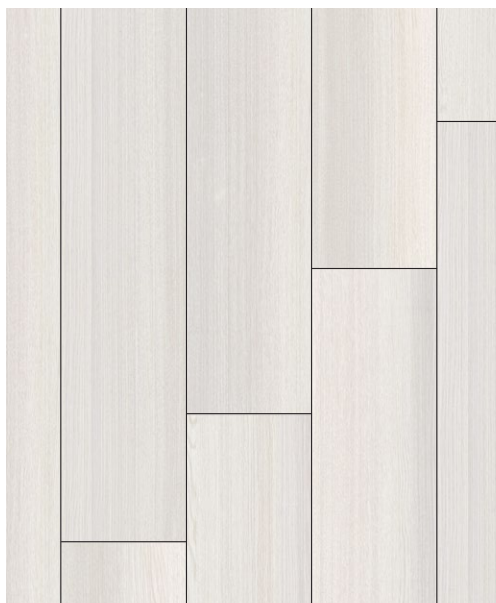

**Creamy Oak - 1445**

Plank Size : 184 x 950mm  
Thickness : 3mm  
Wear Layer : 0.2mm  
Quantity : 19pcs or 36sqft/carton



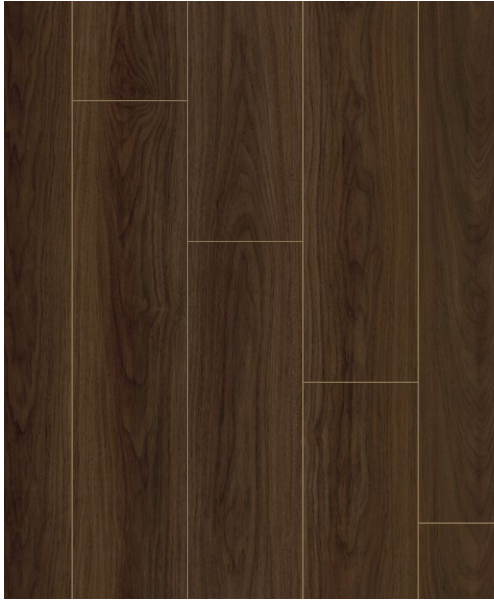

English Walnut - 1062

Plank Size : 184 x 950mm  
Thickness : 3mm  
Wear Layer : 0.2mm  
Quantity : 19pcs or 36sqft/carton








Selenite Stone - 1358

**Tile Size** : 470 x 470mm  
**Thickness** : 3mm  
**Wear Layer** : 0.2mm  
**Quantity** : 15pcs or 35.80sqft/carton



Urban Concrete - 1359

**Tile Size** : 470 x 470mm  
**Thickness** : 3mm  
**Wear Layer** : 0.2mm  
**Quantity** : 15pcs or 35.80sqft/carton

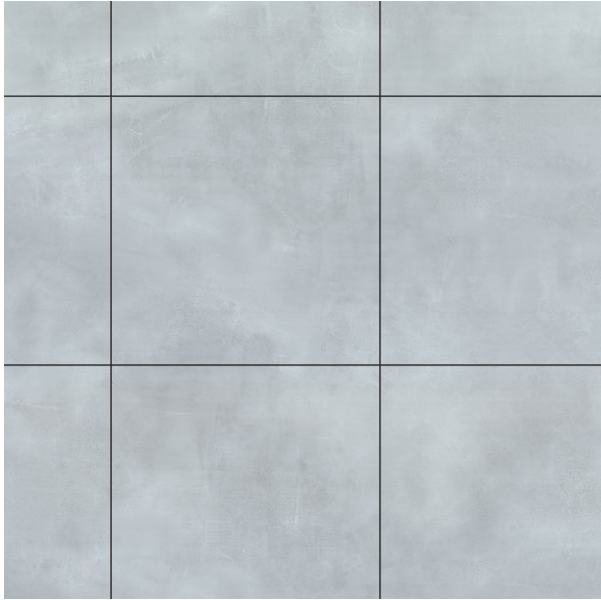







**Tile Size** : 470 x 470mm  
**Thickness** : 3mm  
**Wear Layer** : 0.2mm  
**Quantity** : 15pcs or 35.80sqft/carton



**Tile Size** : 470 x 470mm  
**Thickness** : 3mm  
**Wear Layer** : 0.2mm  
**Quantity** : 15pcs or 35.80sqft/carton







**Vinyl Glue**

**Self Levelling Materials**



4kg pail



8kg pail




5kg bottle/20kg pail







25kg pack

# TECHNICAL DATA - L I V I N N

DESCRIPTION		
Total thickness	-	3 mm
Wear layer	-	0.2 mm
Tile Size	-	184 mm x 950 mm
Surface Treatment	-	PU Coating
Warranty	Residential Light Commercial Light Industry	5 years* 2 years* N/A
Classification	EN ISO 10582	22: Domestic moderate
Thermal Resistance	-	0.03(m <sup>2</sup> ·K)/W
Reaction to fire	EN13501-1 EN ISO 11925-2 EN ISO 9239-1	Bfl – S1 Pass Pass
Resistance to Chemicals	EN 423 ASTM F 925	Class 0 Pass
Resistance to Light	EN ISO 105-B02 ASTM F 1515	≥6 <8
Wear resistance	EN 660-2	Wear Group : T
Flexibility	-	Pass
Dimensional stability	EN 434 ASTM F 2199	≤0.25 % Pass
Acoustic Impact noise reduction	EN ISO 717-2	ΔLw= 6 dB
Static electrical propensity	EN 1815	Voltage: 0.5kV
Residual Indentation	EN 433 ASTM F 1914	≤0.1 mm <8 %
Anti-slip property	DIN 51130	R10
VOC emission	ISO 16000	A+
Phthalates	EN 14372 CPSC-CH-C 1001-09.3	N.D Pass
Castor chair continuous use	ISO 4918	Pass
Squareness	ISO 24342	≤0.20 mm


EN14041

\*T & C apply

## CERTIFICATES






## PRODUCT GUIDELINE

### Preparation:

- Subfloor must be clean, dry, FLAT & free of debris.
- Make sure all required procedures are completed and planks with visible defects are not installed.
- Always examine your flooring for damage or defects before installation.
- Any contaminants must be removed clearly prior to the installation.

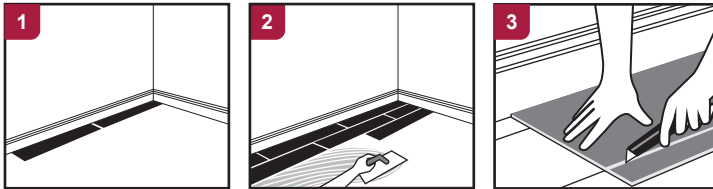

### Installation:

- Determine the center of the room by measuring each end wall and marking the center of the wall.
- Chalk a line across the points and measure to determine the center point. At a right angle to the chalk line, using the center point, chalk another line out to the other walls.
- Start to apply adhesive on the first quarter of the marked line & lay-out for 15 minutes to lay tiles. Once done, proceed the same at another part & install accordingly. Different adhesive may have different properties. Read the adhesive manufactures instruction carefully before uses.
- Keep a short distance from the wall to edge of the flooring products.
- Press the product down firmly after installation & allow 24 hours to fully cured.

### After Installation & Maintenance:

- Do not fix any furniture or objects to the newly installed floor for 2 - 3 days.
- Do not wash or scrub the new flooring for at least 5 days after the installation.
- Sweep regularly to remove surface grit and dust. Use a damp cloth or mop to clean up any dirt and footprints.
- All spills should be cleaned up immediately.
- Do not use polishes, waxes, harsh chemicals or abrasive cleaners on the floor as they might dull or distort the finishes.



# LIVINN

LUXURY KOREAN VINYL FLOORING

FEATURES



SUITABLE FOR  
RESIDENTIAL



SUITABLE FOR  
HEAVY TRAFFIC



WEAR  
RESISTANT



SLIP  
RESISTANT



SCRATCH  
RESISTANT



EASY  
CLEANING



DURABILITY



ANTI-TERMITES



WATER RESISTANT



PET FRIENDLY



GREEN





LIVINN

FIRST CHOICE



OUR BRANDS



scan to visit

[www.primelay.com.my](http://www.primelay.com.my)

PSF INDUSTRIES SDN BHD (912218-D)

No. 19, Jalan BA/3, Kawasan Perusahaan Bukit Angkat, 43000 Kajang, Selangor, Malaysia.

+603-8741 3841

+6017-556 0103

admin@primelay.com.my

