

ELEGANT CLIQ 4



Premium Quality

**SPC CLICK
FLOORING**

PRODUCT SPECIFICATION

Tile Size : 183 x 1220mm
Total Thickness : 4mm
Wear Layer : 0.25mm
Packing : 10pcs / carton or 24.06sqft / carton

846 - MOONLIT PINE

1215 - GOLDEN TEAK

538 - HERITAGE OAK

845 - BLEACHED ASH

1446 - MALABAR WOOD

843 - TAWNY TEAK





COLOUR NAME:

MOONLIT PINE


PRODUCT CODE: **846**



COLOUR NAME:

GOLDEN TEAK


PRODUCT CODE: **1215**

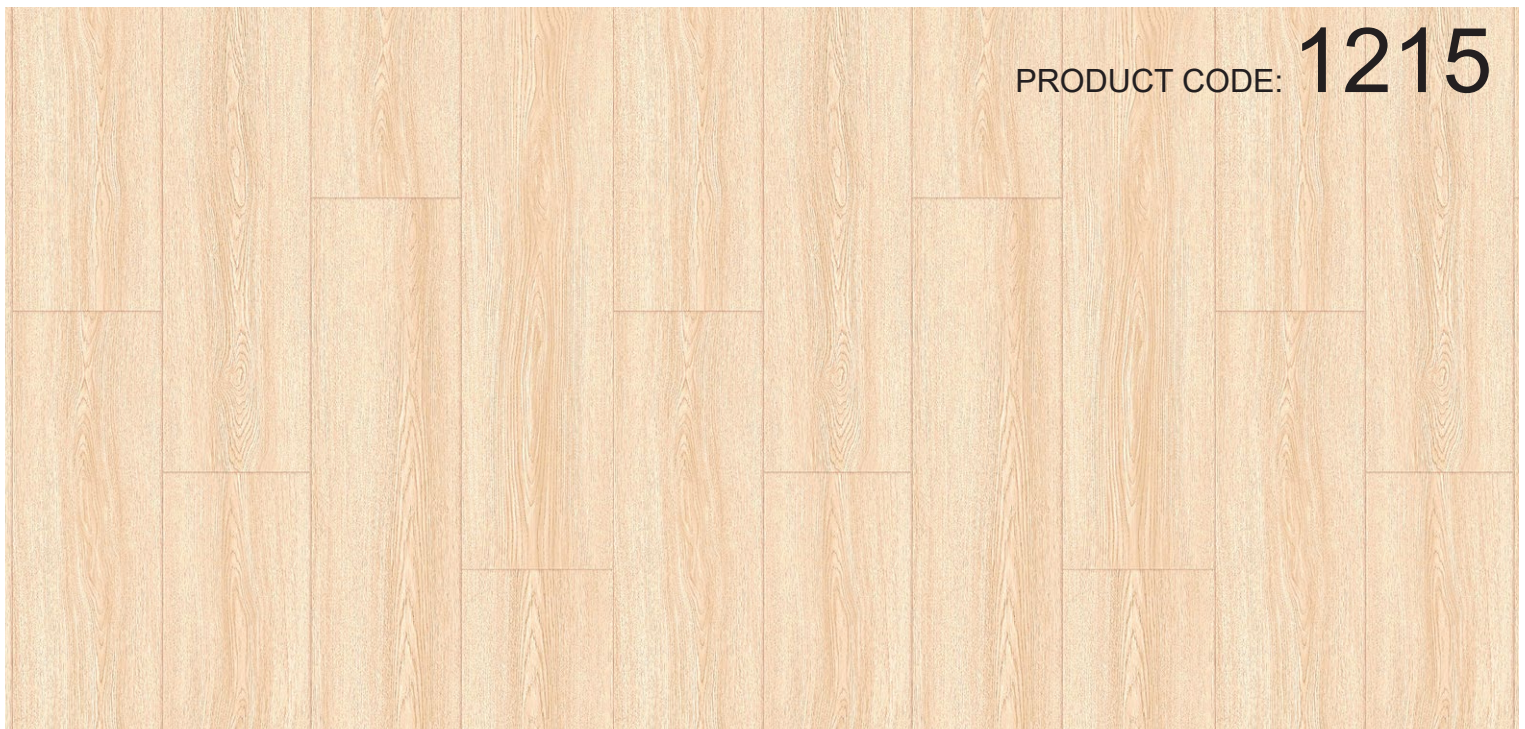



COLOUR NAME:

HERITAGE OAK

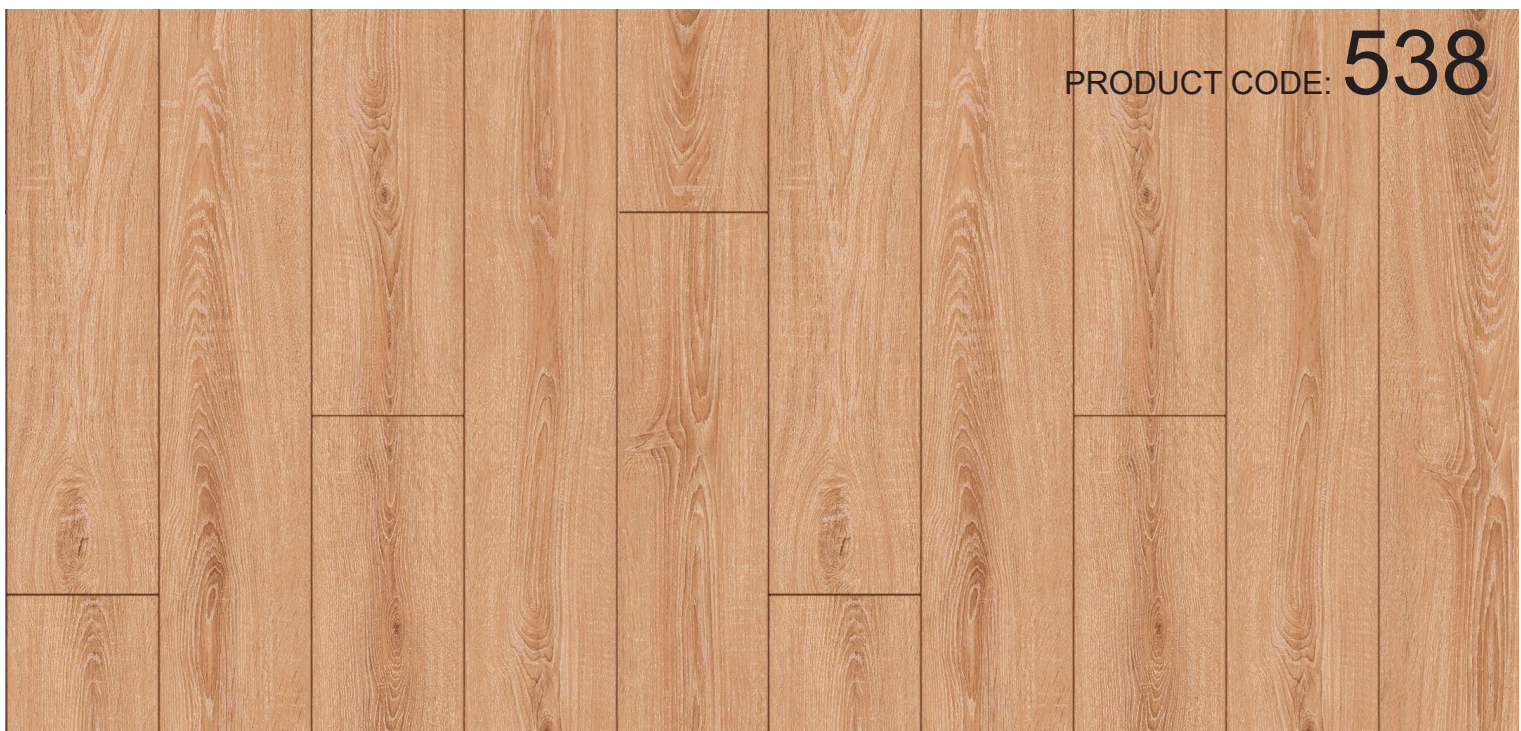

PRODUCT CODE: **538**



COLOUR NAME:

BLEACHED ASH




PRODUCT CODE: **845**



COLOUR NAME:

MALABAR WOOD

PRODUCT CODE: **1446**

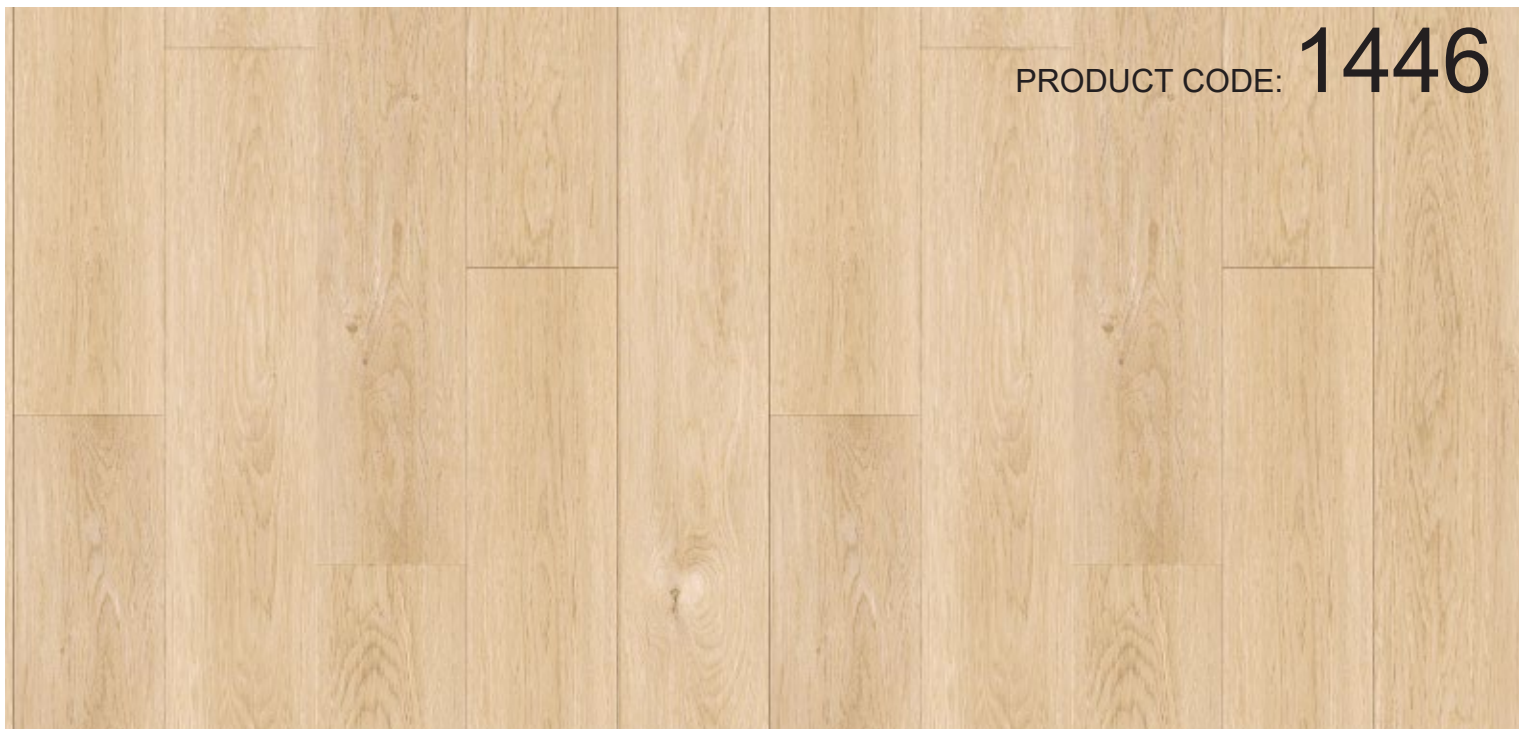







COLOUR NAME:

TAWNY TEAK

PRODUCT CODE: **843**

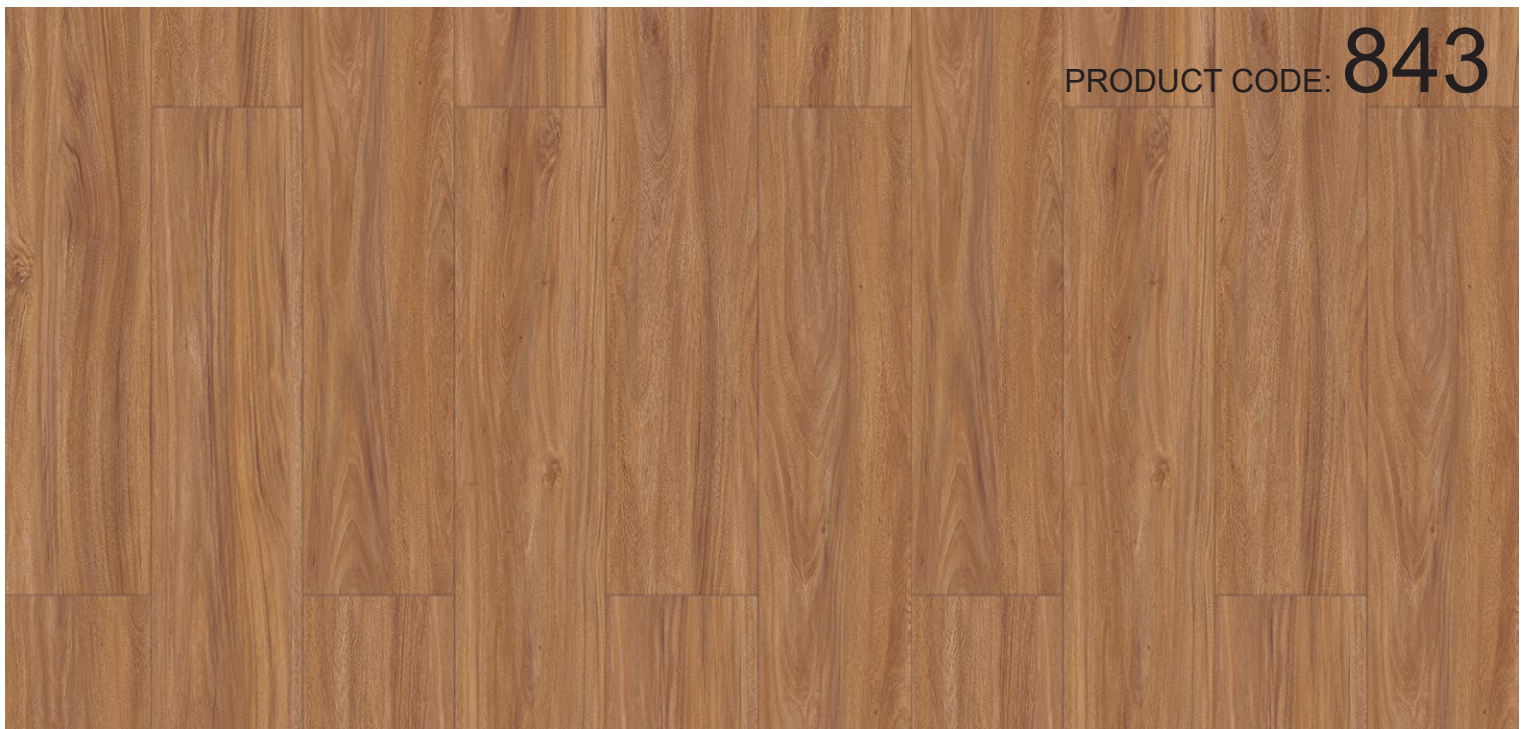

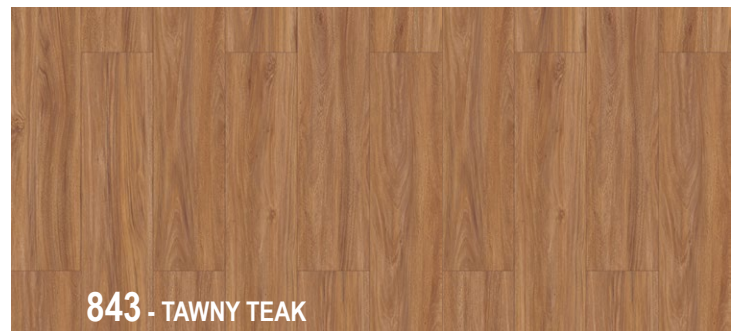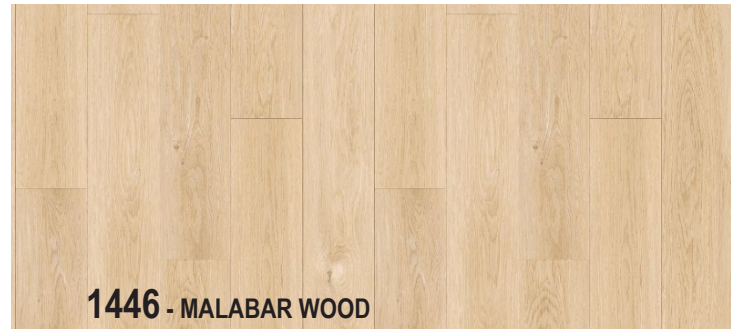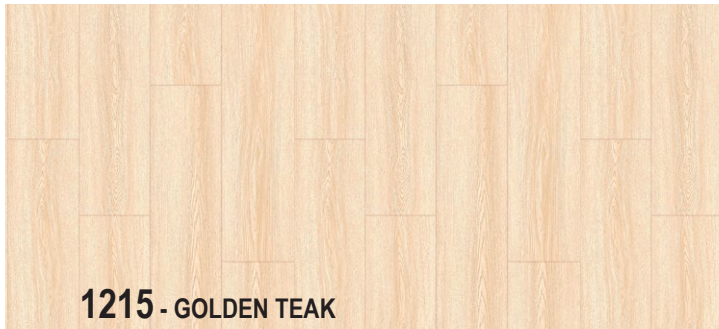

ADVANTAGES

Flexibility design options

Available in various kinds of colors, customized is possible.

Durable

High density rigid core, much stronger than regular vinyl and enhanced click system.

Water-resistance

100% water resistance, can be installed in bathroom and kitchen.

Stable

It's with very tiny dimension changing or deforming under 80 Centigrade hot temperature.

Easy DIY

Glue free, easy installation with click & lock system.

Eco-friendly

Safe & sustainable, say goodbye to formaldehyde.

Sound reduction

Reduce noise because of extursion technical and high density.

Easy to Clean

Convenient maintenance by simple mopping.

COMPARISON

| Different Types | ELEGANT CLIQ SPC Floor | Regular Vinyl | Laminate floor |
|--|------------------------|---------------|----------------|
| Rigid core for click with a easy & fast installation | ✓ | X | ✓ |
| Suitable for small imperfections under floor | ✓ | X | ✓ |
| Little under floor preparatation required | ✓ | X | ✓ |
| Stability in high temperature environment | ✓ | X | ✓ |
| Stability in high Humid environment | ✓ | X | X |
| Stability in rooms with sun lights | ✓ | X | ✓ |
| Perfect sound absorbent | ✓ | ✓ | X |
| Water-resistance, install in bathroom and laundry room | ✓ | ✓ | X |
| Core free of plasticizers | ✓ | X | X |
| Core free of formaldehyde | ✓ | ✓ | X |
| Indentation & impacts resistance | ✓ | X | ✓ |
| Easy to install with drop-down lock system | ✓ | X | ✓ |

PRODUCT SPECIFICATION

| PRODUCT DESCRIPTION | | |
|-----------------------|-------------------|---|
| Size | Overall Thickness | 4mm |
| Top layer | Type | Enhanced UV cured coating |
| | Thickness | Wear layer of 0.25mm |
| Core | Type | Waterproof Vinyl based composite |
| | Thickness | 3.75mm |
| | Color | Light Brown |
| | Density | ≥ 2000kg/m ³ |
| Backing | Type | None |
| | Thickness | None |
| Bevel | | Micro bevel |
| Locking system | | 2G/2G |
| Type of installation | | Floating |
| Material Type | | 100% Virgin material only |
| DIMENSIONAL TOLERANCE | | |
| Thickness tolerance | | +/- 0.2mm |
| Width tolerance | | +/- 0.1mm |
| Length tolerance | | +/- 0.5mm |
| Height difference | | Handscraped texture ≤ 0.30mm, Others texture ≤ 0.15mm |
| Gap between planks | | ≤ 0.20mm |
| Cupping up | | ≤ 0.15% of the planks width |
| Cupping down | | ≤ 0.2% of the planks width |
| End lift | | ≤ 0.5% of the planks length |
| Bowing | | ≤ 1.0% of the planks length |
| Squareness | | ≤ 0.25mm/ 305mm |

| | Norm | Test method | Requirement | Test results | Conclusion |
|---|-----------------------------------|---------------------------------|--|---|---|
| CHEMICAL COMPOSITION | | | | | |
| Formaldehyde emission | CARB | ASTM 6007 | ≤ 0.11 ppm | Not detected | Meet CARB phase 2 requirement |
| | EN 14041 | EN 717-1 | ≤ 0.124 mg/m ³ | 0.01 | E0 |
| VOC | Decret No2011-321 | ISO 16000 | TVOC<1000µg/m ³ | 27(96h) | Pass |
| | Floorscore | Californian 01350 | Within CREL/TAC | 20.833 | Floorscore certified |
| Ortho-phthalates | Prop 65 | Spectrometry | Ortho-phthalate free | Not detected | Ortho-phthalate free, Comply with Prop 65 |
| Substances of Very High Concern (SVHC) (mercury, chromium VI, Cadmium, SCCp, benzene, Xylene, tributyltin, etc) | EU REACH regulation No. 1907/2006 | Spectrometry and chromatography | ≤ 0.1% (w/w) | Not detected | REACH compliant |
| Soluble heavy metal | | ASTM F963-11 | | Not detected | Pass |
| PHYSICAL PROPERTIES | | | | | |
| Heat exposure resistance 80°C/180°F | ASTM 1700v | ASTM F2199 | ΔW/ΔL ≤ 0.16% | 0.04% | Pass |
| Swelling after submersion in water | EN 16511 | ISO 24336 | ≤ 12% | 0% | Pass |
| Locking strength (23°C) | EN 16511 | ISO 24334 | Long side≥2.0 kN/m, Short side≥ 3.5kN/m | Long side = 6.3 kN/m, Short side =5.4 kN/m | Pass |
| Reaction to fire | EN 14041 | EN 13051-1 | - | CHF=9.4kW/m ² | Class Bfl -S1 |
| Fire resistance (CHF) | - | ASTM E648 | ≥0.45W/cm ² | 1.1 W/cm ² | Class I |
| SURFACE PROPERTIES | | | | | |
| Wear resistance | - | ISO 1518-1 | ≤ 0.015g/1000 rev | 0.008 | Pass |
| | EN 16511 | EN 13329 | ≥ 4000 cycles | 6300 | Pass |
| | NALFA LF 01-2011 | NALFA LF 01-2011 | ≥ 6000 cycles | 6300 | Pass |
| Scratch | - | ISO 1518-1 | ≥ 2500g | 3200g | Pass |
| Surface bonding | NALFA LF 01-2011 | EN311/NALFA LF 01-2011 | ≥ 1.5 N/mm ² | 1.56 N/mm ² | Pass |
| Static load | NALFA LF 01-2011 | ASTM F970 | ≥ 13.8Mpa (2000psi/450kg) | 0mm - Pass | Pass |
| Residual indentation | ASTM F1700 | ASTM F1914 | ≤ 8% (140 lbs/63kg) | 0.10% | Pass |

FEATURES:



ANTI-SLIP



EASY TO MAINTAIN



FIRE RESISTANT



TERMITE PROOF



SCRATCH & WEAR
RESISTANT



WATER
RESISTANT



SPILL & STAIN
RESISTANT



MULTI LAYERS
PROTECTION



SAFE QUIETER
WARMER



PRIME SPC

ELEGANT CLIQ

KAYU PLUS

LIVINN

PRIME FLOOR

CARPET TILE

BROADLOOM CARPETS

MOSQUE CARPETS

URBAN CLIQ

FIRST CHOICE

Yes!

Floor Plus+ Accessories

PRIMEFIT

PRIME Play

PRIME Décor

PRIME Ballistic

PRIME Sports

PRIME Paver

PRIME Flex

Grass King

AcoustED UNDERLAY

DURAFORT UNDERLAY

Aktiv MAT

Activ Sports Surface

OUR BRANDS



PSF INDUSTRIES SDN BHD (912218-D)

No. 19, Jalan BA/3, Kawasan Perusahaan Bukit Angkat, 43000 Kajang, Selangor, Malaysia.

+603-8741 3841

+6017-556 0103

admin@primelay.com.my


www.primelay.com.my



scan to visit

Introducing Our App

New Deals And Products, just a tap away, download below



GET IT ON Google Play



Download on the App Store

