








New Street-1093



Avenue Five-1094



Third Lane-1095

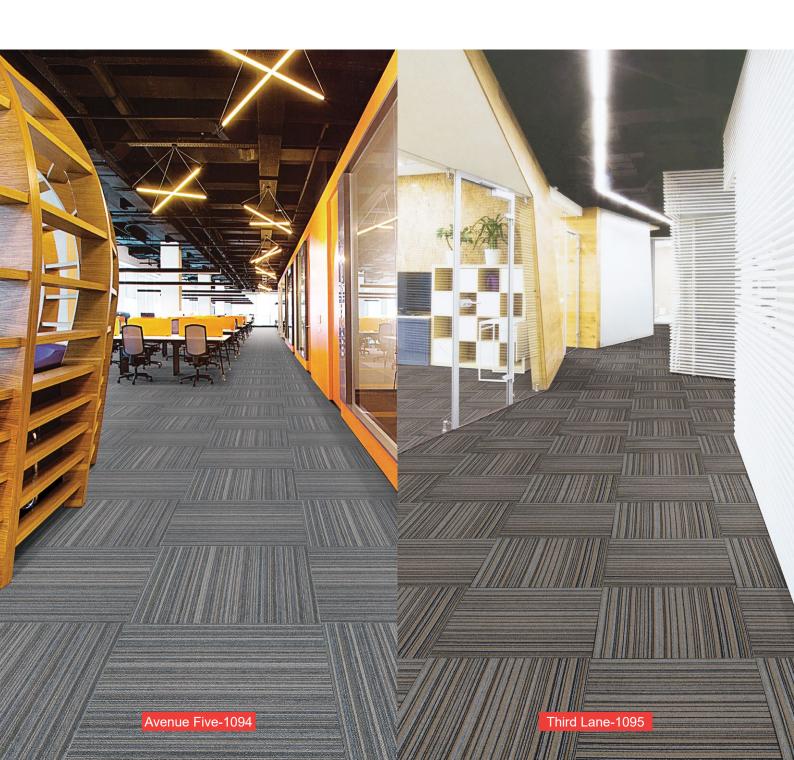



## **SPECIFICATION**

Product Name : FIREWALL CT

Construction : Tufted Level Loop Pile

Yarn Type : 100% BCF Synthetic Fiber

Total Thickness: 5-6mm +/Pile Weight: 25 oz +/-

**Backing Type**: Improved Bitumen + Non-woven

Tile Size : 500mm x 500mm

Tile Per Box : 20pcs

#### **IMPORTANT NOTES:**

- Vacuum carpets regularly in a diagonal direction.
- Use a good quality carpet cleaner according to the manufacturer's instructions to remove stains and avoid using petrol or similar products.
- Actual production may vary slightly from the sample due to batch variations.
- Dye lot variations may cause slight color differences in carpets.
- $\bullet \ \mathsf{Protect} \ \mathsf{carpets} \ \mathsf{with} \ \mathsf{chair} \ \mathsf{pads} \ \mathsf{to} \ \mathsf{maintain} \ \mathsf{appearance}, \ \mathsf{prevent} \ \mathsf{wear}, \ \mathsf{and} \ \mathsf{avoid} \ \mathsf{carpet} \ \mathsf{delamination}.$
- Shading, commonly known as "water marking," is an effect of carpet pile direction changes, and it is a characteristic of the product and not a manufacturing defect.
- Special attention may be required by installers for patterned carpets to ensure a suitable match.

# RECOMMENDED INSTALLATION METHODS

Quarter-turn

Ashler-turn



















Wear





### OUR BRANDS





















































### PSF INDUSTRIES SDN BHD (912218-D)

No. 19, Jalan BA/3, Kawasan Perusahaan Bukit Angkat, 43000 Kajang, Selangor, Malaysia.

www.primelay.com.my

+6017-556 0103











