

LUMINEX

HOMOGENEOUS VINYL FLOORING



CERTIFIED
LOW VOC



ANTI-IODINE
ANTI-ACID
ANTI-ALKALI



ANTI-BACTERIAL



TERMITE
PROOF



SOUND
ACOUSTIC



100%
WATERPROOF



WEAR
GUARD



SCRATCH
RESISTANT



SLIP
RESISTANT



STAIN
RESISTANT





FADE
RESISTANT



100%
RECYCLABLE

- 1** Resource saving, environment protection, green and low carbon emission.
- 2** Super fire resistance to guarantee safety in use.
- 3** Excellent anti-acid, anti-alkali, anti-stain and abrasion resistance.
- 4** Great elasticity and extremely low indentation from rolling and static load.
- 5** Non-directional design helps to reduce waste during installation.
- 6** Rich and complete color combination to meet the needs of different scenes collocation.

- 1** PUR Coating
- 2** Homogeneous Structure

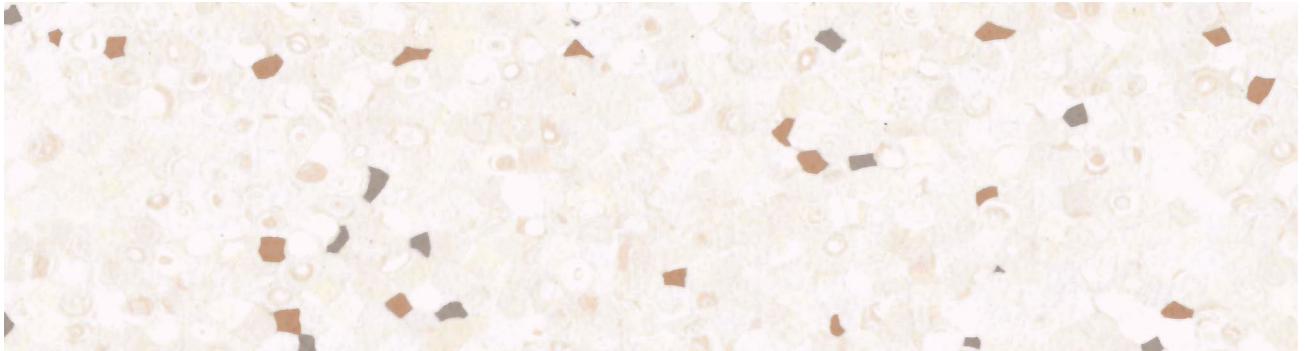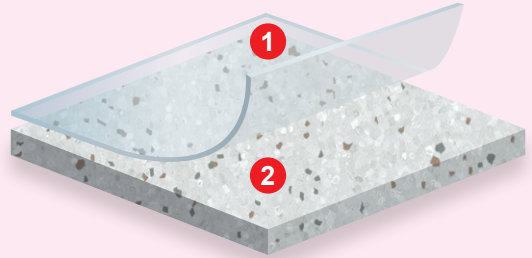


1194-Dune Beige

★ In stock




1198-Sandy Brown

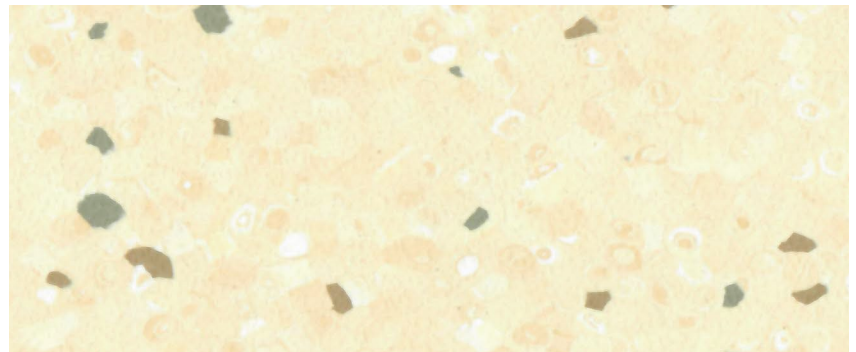

1199-Corn Silk




1200-Lemon Zest

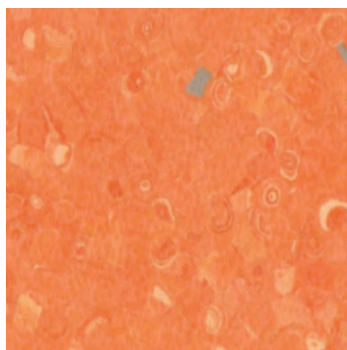


1201-Orange Crush




1206-Powder Blush

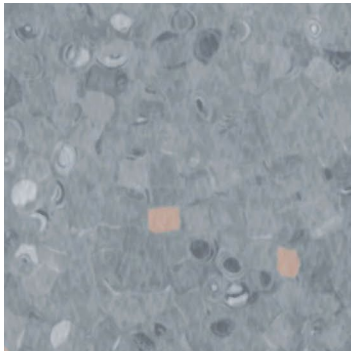


1197-Slate Grey

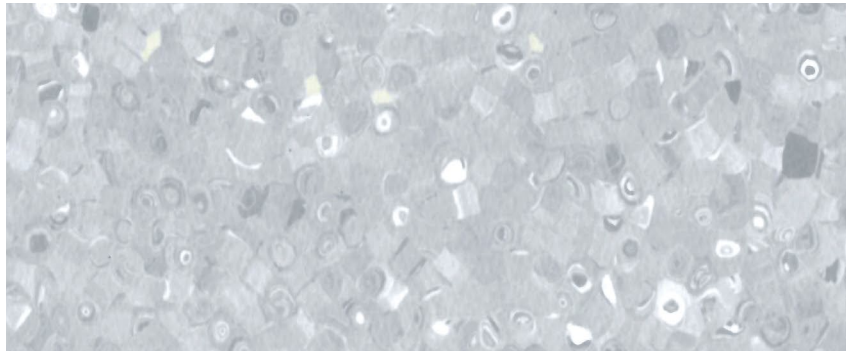


1207-Metallic Grey

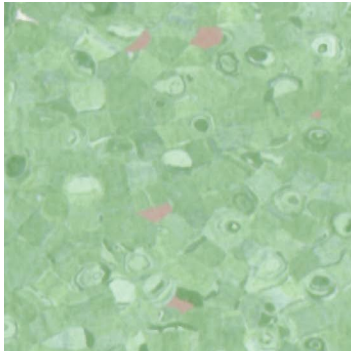


1204-Mossy Green

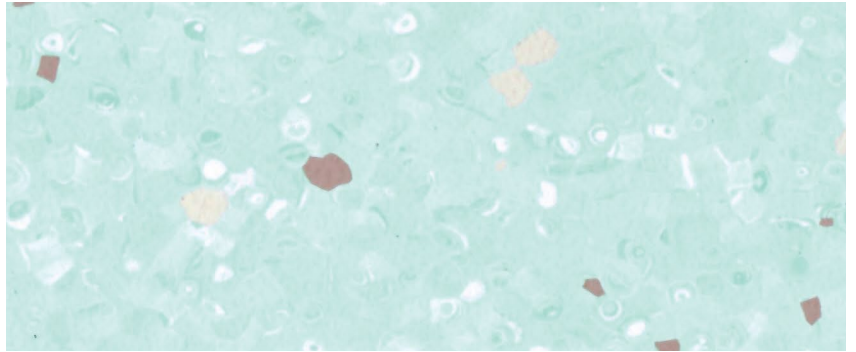

1203-Medic Green

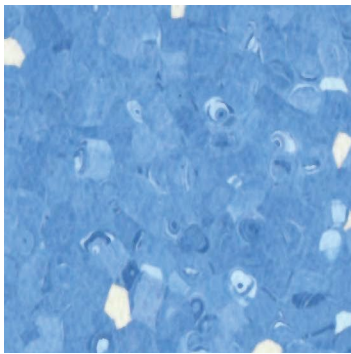


1205-Tornado Blue

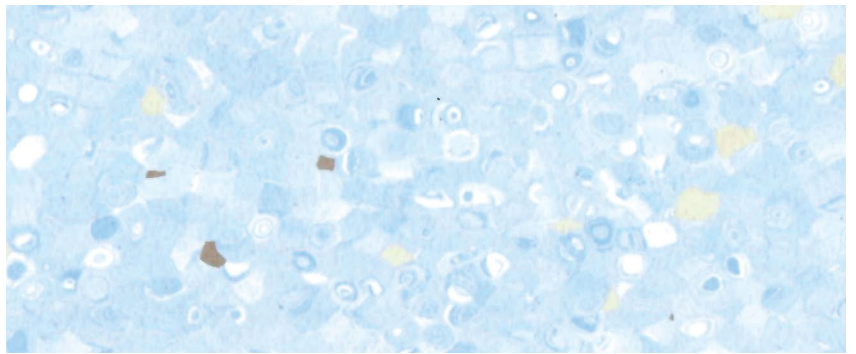

1202-Ocean Odyssey



Education

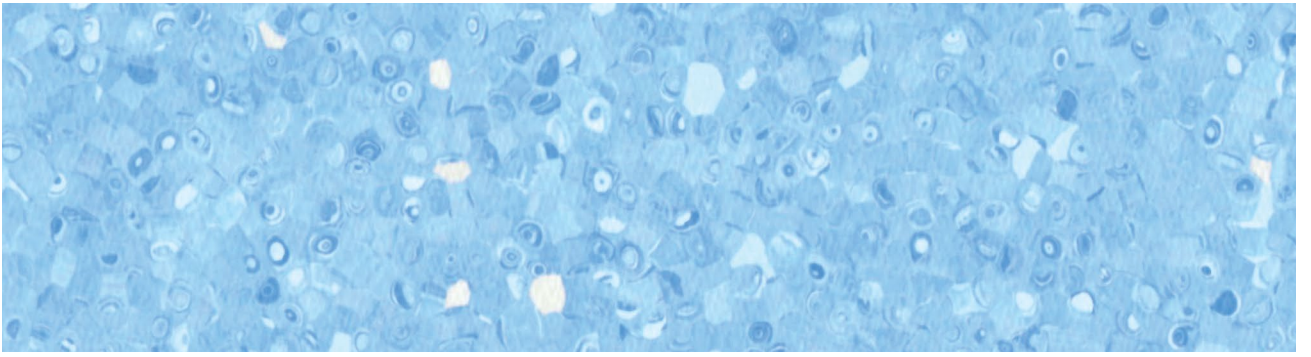


1195-Blue Horizon


★ In stock




1208-Pearl White

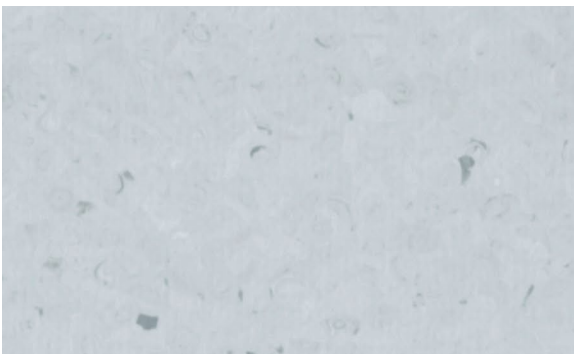

1209-Grey Mirage

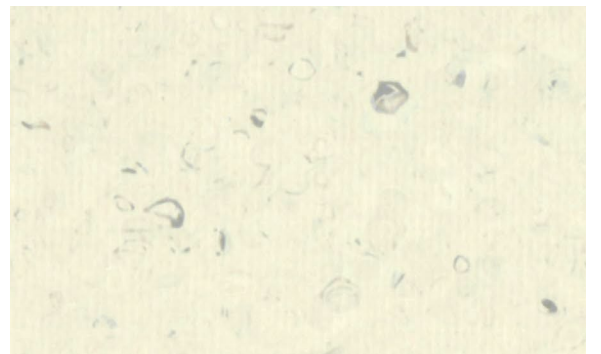

1210-Sand Castle

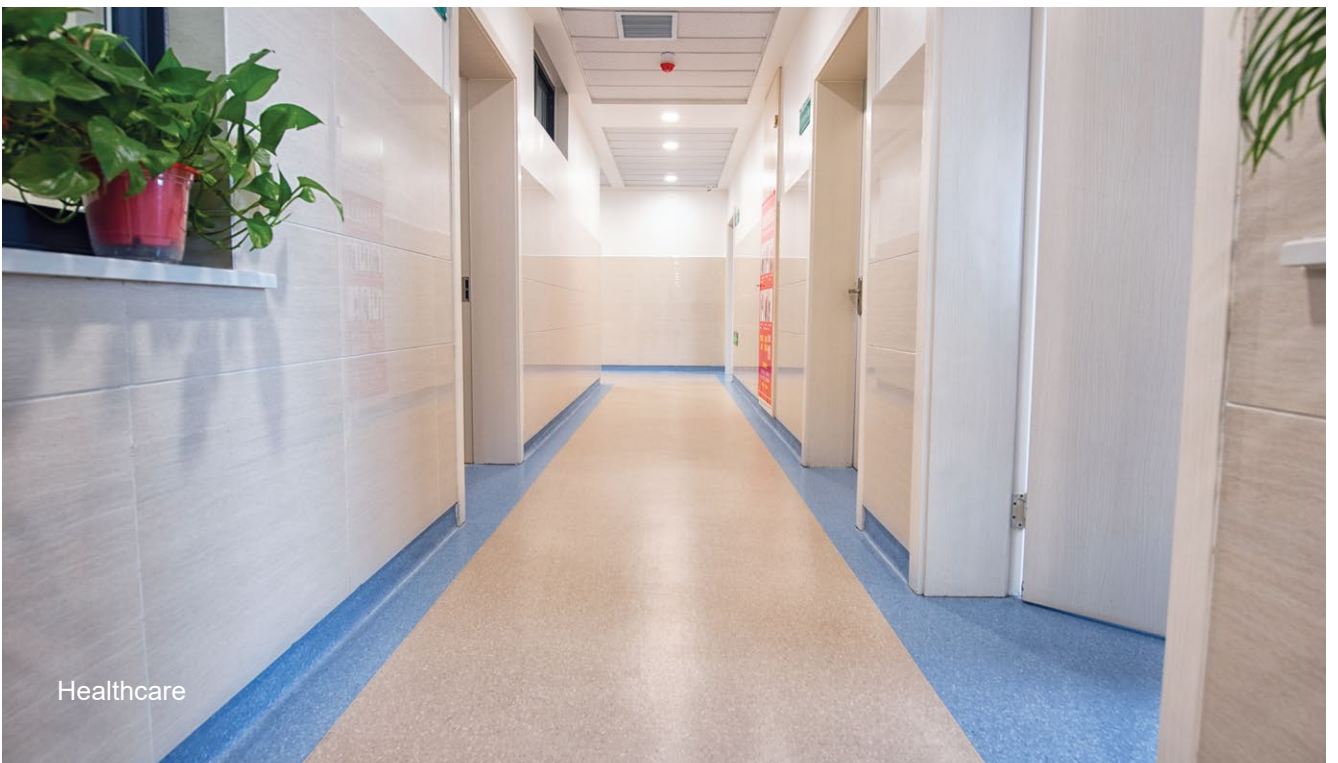

Healthcare




Workplace



1196-Ice Grey

★ In stock

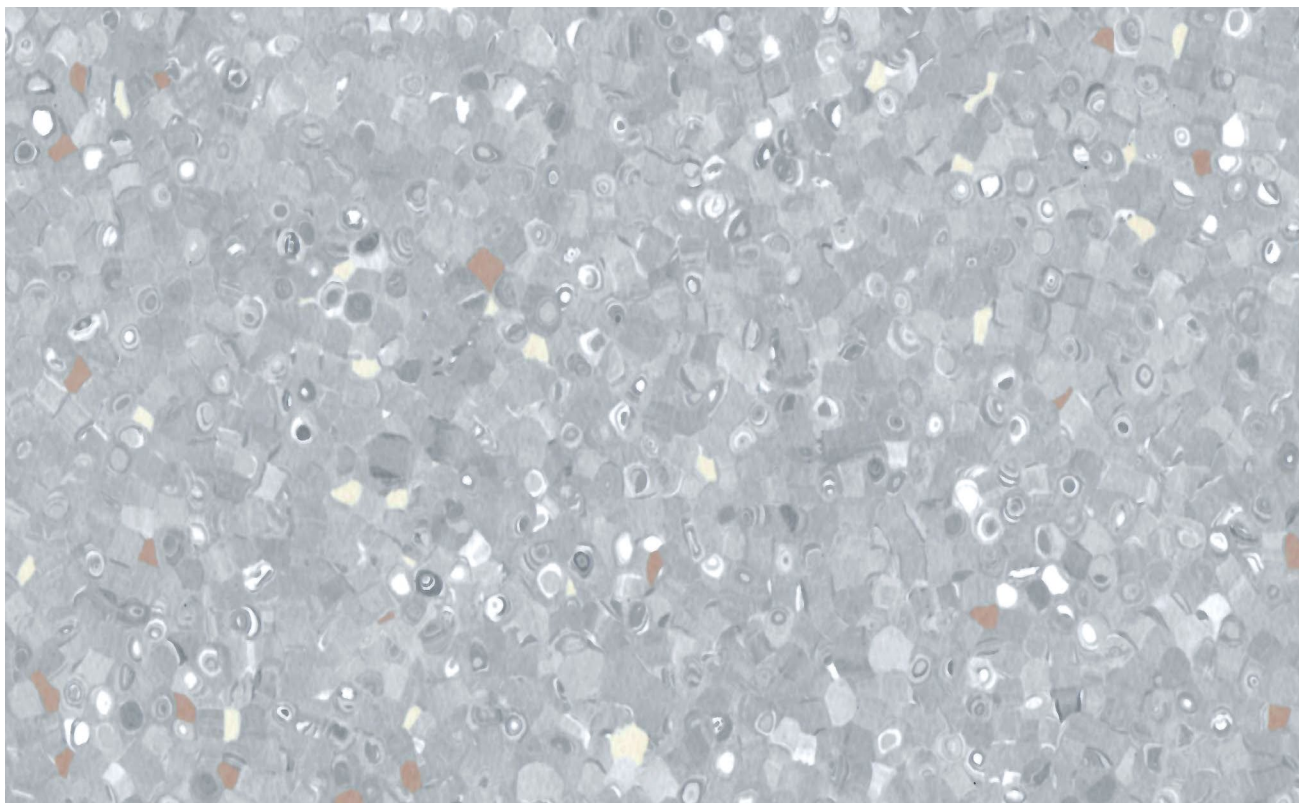

1193-Galaxy Grey

★ In stock



Healthcare

HOMOGENEOUS VINYL FLOORING

TEST ITEMS	TEST METHOD	TEST RESULTS
Total Thickness	EN ISO 24346	2.0mm
Weight	EN ISO 23997	2850g/m ²
Roll Width	EN ISO 24341	2m
Roll Length	EN ISO 24341	20-24m
CLASSIFICATION		
European Rating	EN 685	34-43
Fire Classification	EN 13501-1	ClassBf _{1,s1}
	EN ISO 9239-1	≥8KW/m ²
Anti-static Property	EN ISO 11925-2	Qualified
	EN 1815	< 2KV
Anti-slip Test	DIN 51130	R9
	EN 13893	μ≥0.3
PERFORMANCE		
Wear Resistance	EN 660-2	Group T Fv≤2.0mm ³
Dimensional Stability	EN ISO 23999	≤0.4%
Residual Indentation	EN ISO 24343-1	≤0.04mm
Castor Chair Test	EN 425	Qualified
Flexibility	EN ISO 24344	Qualified (20mm)
Color Fastness	EN ISO 105-B02	Grade 6
Chemical Resistance	EN ISO 26987	Fine
Anti-iodine	EN ISO 26987	Grade 0
Anti-bacterial Property	EN ISO 846	No Bacteria
Special Maintenance Treatment		PUR
TVOC after 28 Days	ISO 16000	< 10μg/m ³
Improvement of Sound Insulation	EN ISO 717-2	3dB



CNAS L0690



CNAS C024-Q



ISO14001



ISO9001



ISO45001



PRIME SPC

ELEGANT CLIQ

KAYU PLUS

LIVINN

PRIME FLOOR

CARPET TILE

BROADLOOM CARPETS

MOSQUE CARPETS

URBAN CLIQ

FIRST CHOICE

Yes!

Floor Plus+ Accessories

PRIMEFIT

PRIME Play

PRIME Décor

PRIME Ballistic

PRIME Sports

PRIME Paver

PRIME Flex

Grass King

AcoustED UNDERLAY

DURAFORT UNDERLAY

Aktiv MAT

Activ Sports Surface

OUR BRANDS



PSF INDUSTRIES SDN BHD (912218-D)

No. 19, Jalan BA/3, Kawasan Perusahaan Bukit Angkat, 43000 Kajang, Selangor, Malaysia.

+603-8741 3841

+6017-556 0103

admin@primelay.com.my


www.primelay.com.my




scan to visit

Introducing Our App

New Deals And Products, just a tap away, download below



GET IT ON Google Play



Download on the App Store

